


MINI CRUSHERS

PRODEM MINI CRUSHERS BOAST FULL ROTATION WITHOUT THE NEED TO HAVE A HYDRAULIC ROTATION CIRCUIT ON YOUR EXCAVATOR.

BENEFITS OF PRODEM MINI CRUSHERS

- >> Hardened jaw made of HARDOX steel
- >> Wide jaw opening for a large demolition work surface
- >> Easy maintenance
- >> Lightweight but rigid body frame
- >> As an optional extra the PMC050 model is available with hydraulic rotation

NO ROTATION CIRCUIT? NO PROBLEM. FOR MAXIMUM PERFORMANCE AND PRODUCTIVITY ON MINI EXCAVATORS THE PMC RANGE BOASTS A KNOCK ROUND ROTATION SYSTEM AND THEREFORE DOESN'T REQUIRE A HYDRAULIC ROTATION CIRCUIT ON THE EXCAVATOR

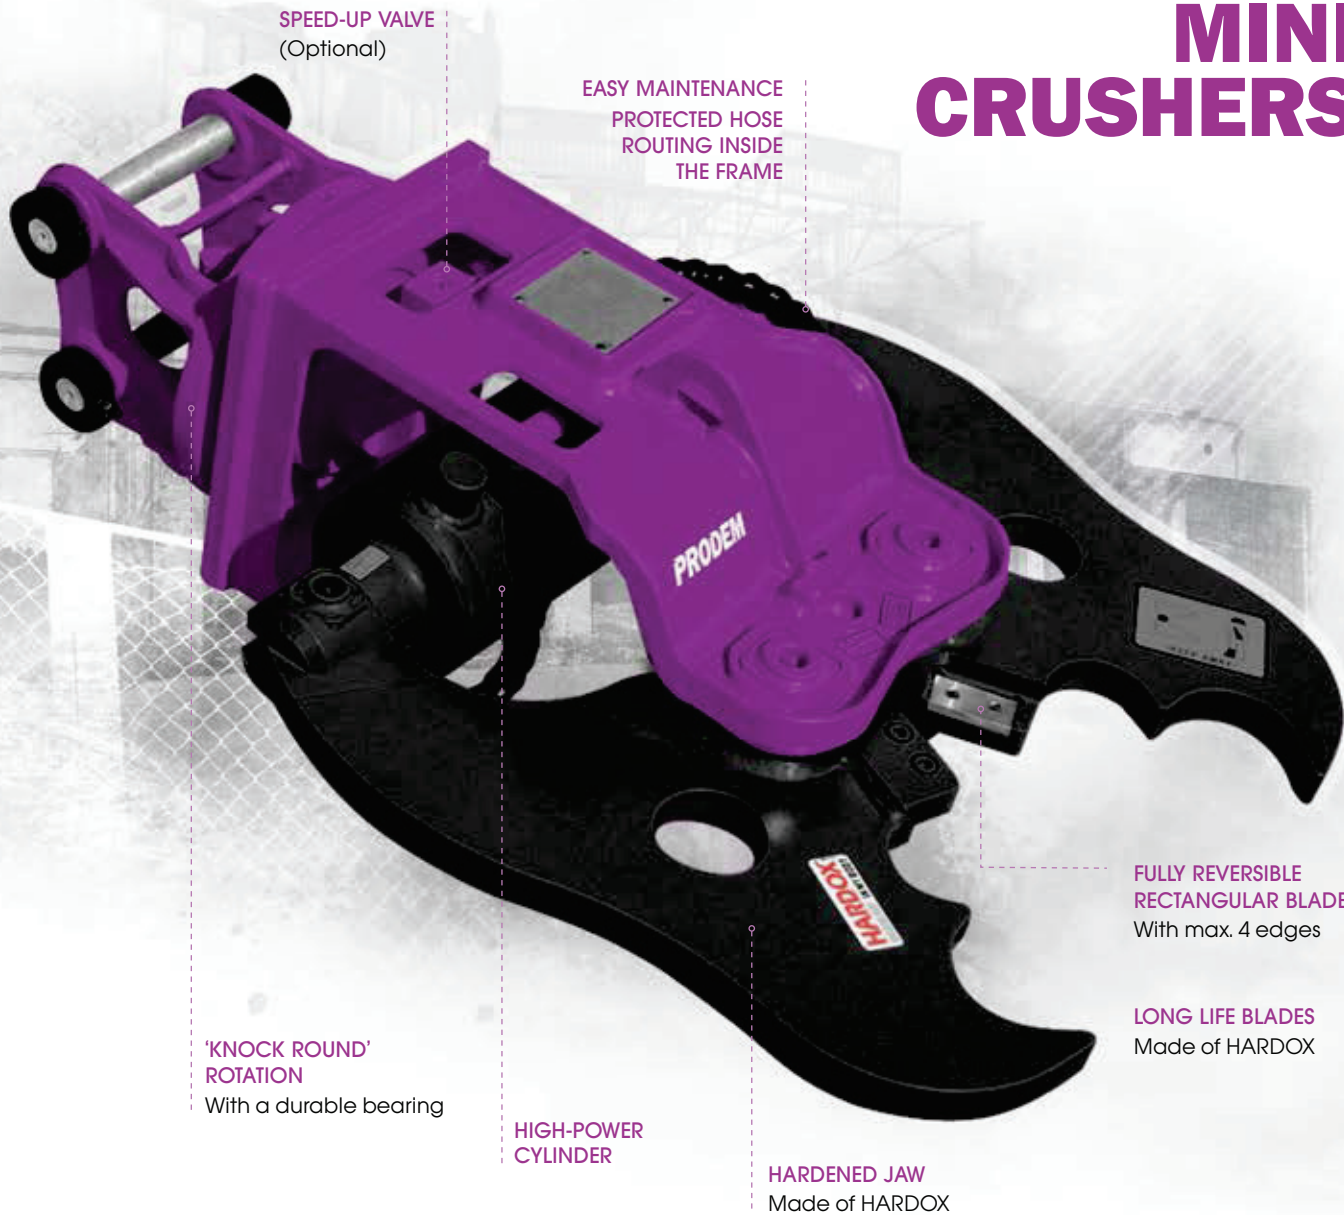

SPEED-UP VALVE
(Optional)

EASY MAINTENANCE
PROTECTED HOSE
ROUTING INSIDE
THE FRAME

'KNOCK ROUND'
ROTATION
With a durable bearing


HIGH-POWER
CYLINDER

HARDENED JAW
Made of HARDOX


FULLY REVERSIBLE
RECTANGULAR BLADES
With max. 4 edges

LONG LIFE BLADES
Made of HARDOX


TECHNICAL SPECIFICATION




PMC015



PMC020



PMC025



PMC030



Model	Excavator Weight Class (t)	Working Weight (kg)	Overall Length L (mm)	Overall Width W (mm)	Max Jaw - Opening JW (mm)	Max Jaw - Depth JD (mm)	Jaw Thickness (mm)	Cutting Blade - Length (mm)	Required Oil Flow (l/min)	Max Operating Pressure (bar)	Crushing Force - tip (bar)	Max Crushing Force - Point A	Rotation Type
PMC015	1.5-2	143	969	659	320	258	30	60	15-35	210	210	36	Free
PMC020	2-3	191	1031	709	370	294	40	80	20-40	230	230	47	Free
PMC025	2.5-3.5	224	1104	800	430	338	40	80	25-45	270	270	62	Free
PMC030	3-4.5	308	1195	776	430	367	50	90	30-50	270	270	64	Free
PMC050	4.5-8	480	1362	850	520	N/A	96	100	50-80	210	N/A	99	Free/Hyd. Optional