


# EXCAVATOR FLAILS & MULCHERS

As the sole importer of the Berti Hydraulic Flails and Mulchers we are able to offer a full range to suit 1.5 - 45 ton excavators. Designed for rigorous use on excavators, Berti Flails and Forestry Mulchers are reliable, cost effective and powerful. With many different cutting widths and tooth/hammer/blade types please contact us to discuss your requirements in detail to ensure that you get maximum performance.

	MINI/SB 50	NKR/SB 60	NKR/SB 80	NKR/SB 100	GKR/SB 60	GKR/SB 80	CKT/SB80	CKT/SB100	PARK/SB90	PARK/SB110	RA/SB95	RA/SB115
Cutting Width (mm)	500	600	800	1000	600	800	800	1000	900	1100	950	1150
Number of Hammers	-	-	-	-	8	12	12	16	12	16	8	10
Number of Blades	20	20	28	36	-	-	-	-	48	36	24	30
Number of Drive Belts	2	-	-	-	-	-	2	2	2	4	3	3
Oil (lpm)	18-22	33-37	33-37	38-42	33-37	38-42	43-47	43-47	63-67	63-67	78-82	78-82
Working Pressure (bar)	220-260	220-260	220-260	220-260	220-260	220-260	195-205	195-205	215-225	215-255	215-225	215-225
Product Weight (kg)	100	145	165	185	165	190	230	260	425	455	420	460
Carrier Weight (t)	1.5-2	2-3	2-3	2-3	2.5-3.5	2.5-3.5	3.5-5.5	3.5-5.5	5.5-8	5.5-8	7.5-9	7.5-9

	RA/SB125	TFB/SB100	TFB/SB120	TFB/SB140	TFB/SB160	TBM/SB100	TBM/SB120	TBM/SB140	TFX/SB100	TFX/SB120	TFX/SB140
Cutting Width (mm)	1250	1000	1200	1400	1600	1000	1200	1400	1000	1200	1400
Number of Hammers	12	10	12	12	14	16	20	24	24	30	36
Number of Blades	36	30	36	36	42	-	-	-	-	-	-
Number of Drive Belts	3	4	4	4	4	4	4	4	4	4	4
Oil (lpm)	78-82	88-92	88-92	105-115	105-115	105-115	105-115	105-115	88-92	105-115	105-115
Working Pressure (bar)	215-225	235-245	235-245	235-245	235-245	275-285	275-285	275-285	235-245	235-245	235-245
Product Weight (kg)	475	505	555	610	660	740	820	900	555	610	660
Carrier Weight (t)	7.5-9	9-13	9-13	9-13	9-13	12-16	12-16	12-16	11-16	11-16	11-16

- A LEVELLING ROLLER
- B ENCLOSED MOTOR
- C SELF-LEVELLING SUPPORT  
with under plate for the mounting bracket
- D PURPOSE MADE MOUNTING HITCH
- E SIDE SKIDS
- F REMOVABLE FRONT INSPECTION HOOD

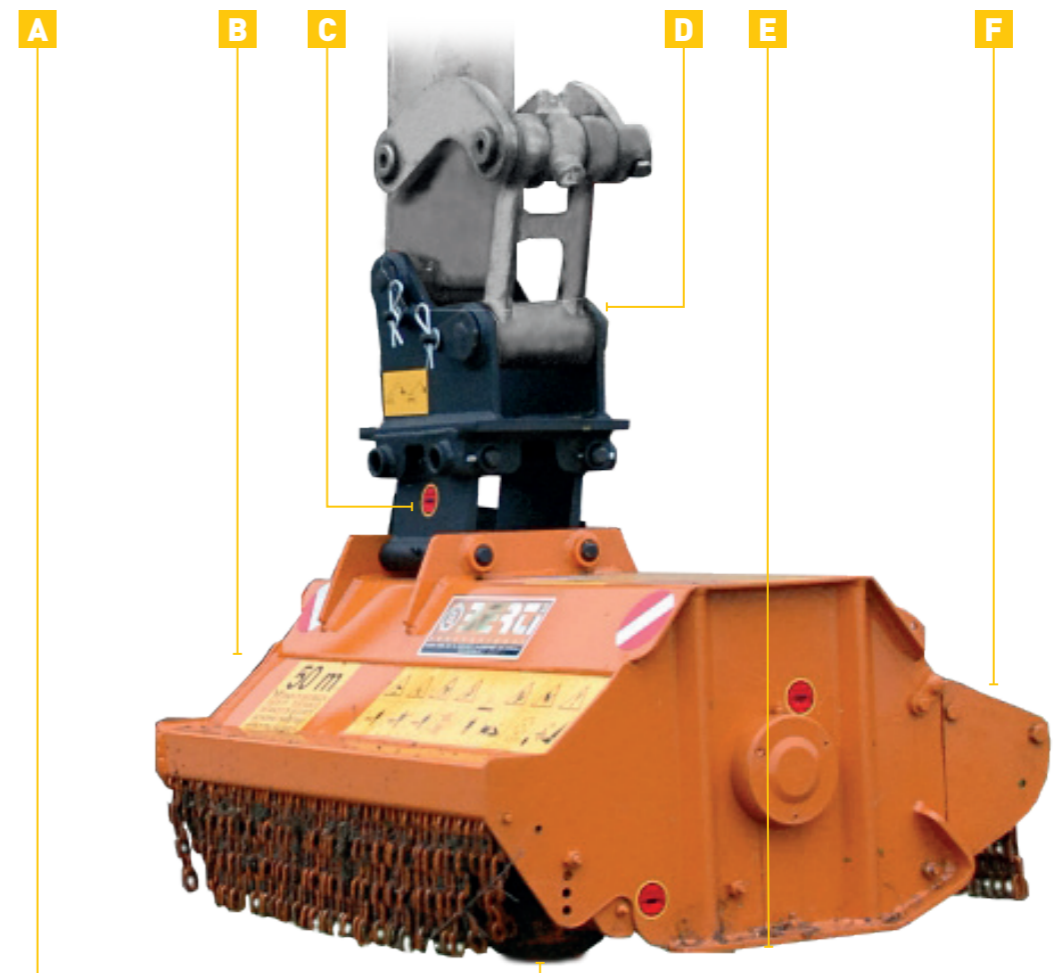

Model Shown - GKR/SB 80